



See price list for available finishes (finish chart is on the order form)

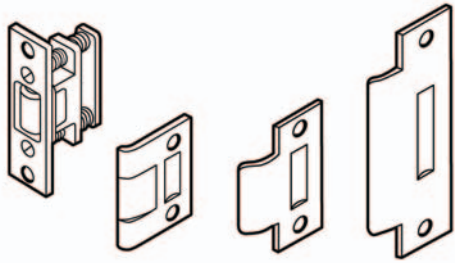

Roller Latches


- **Shelf Pack:** 10 Polybagged
- **Finishes:** 605, 613, 619, 620, 626
- **Material:** Cast Brass

| Models | Size | Strike | ANSI |
|----------|-------------|-------------------|--------|
| 022-1700 | 3-3/8" x 1" | 11-1/16" x 2-1/4" | - |
| 022-1702 | 3-3/8" x 1" | 1-3/4" x 2-3/4" | - |
| 022-1704 | 3-3/8" x 1" | 1-1/4" x 4-7/8" | E19091 |

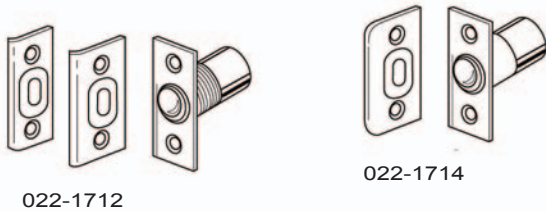

022-1712

022-1714

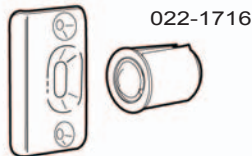

022-1716

Ball Latches

- **Shelf Pack:** 20 Polybagged
- **Finishes**
(1712) 605, 613, 619, 620, 626
(1714) 605, 609
(1716) 605, 609, 613, 619, 620, 626
- 1716 - Drive in Ball Catch
- 1714 - Packed with Full lip round corner strike
- 1712 - Packed with Narrow & Wide Strike, adjustable

| Model | Dimensions | Material |
|----------|-------------|---------------|
| 022-1712 | 2-1/8" x 1" | Cast Brass |
| 022-1714 | 2-1/4" x 1" | Cast Aluminum |
| 022-1716 | 1" | Cast Brass |



019-4030A

019-4030



019-4040

019-4040A

DCI Adjustable Roller Latches

- The 4030 & 4040 Roller Latches are manufactured for heavy duty applications. The latch pressure can be easily adjusted without removing the roller latch from the door. Specify for gates, flush closets, storage doors, or when the door is supplied with push / pull hardware.
- The 4040 are supplied with an 3/16" angle face, and door silencers, to combine a door stop and roller latch.
- The ANSI-161 & ANSI-86 Strikes can be supplied with the 4030 as optional strikes. Available in architectural finishes.
- Conforms to ANSI/BHMA 156.16 Standards

| Models | Description |
|----------|--|
| 019-4030 | Adjustable Roller Latch, includes 019-4030A as a standard |
| 019-4040 | Adjustable Roller Latch with Angle Stop includes 019-4040A as a standard |

See price list for available finishes (finish chart is on the order form)

Ives 2 Elbow Cabinet Catch


- For use on inactive leaf of a pair of cabinet doors.
- Base: 1-3/8" x 5/8"
- Strike: 13/16" X 5/8"



| Models | Finish |
|------------|----------|
| 038-SP2A3 | Brass |
| 038-SP2A92 | Aluminum |

Ives 4 Way Ball Catch

Four-way catch with hexagon stud is constructed of brass and is ideal for holding medium duty doors. The strike slides between two stainless steel balls, which are under spring tension. As the strike engages, the door is held firmly shut. Strike can enter body from any direction. Spring tension is easily adjusted to suit field conditions. Body can be surface applied or mortised into frame.

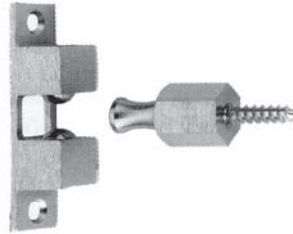


- Body: 3" tall x 3/4" wide x 3/4" deep
- Strike: 1-1/2" tall x 3/4" wide hex
- Finish: US26D.
- Meets ANSI/BHMA 156.9

| Model |
|----------|
| 038-CL21 |

Ives 3 Way Ball Catch

Three-way catch has a plate type strike is constructed of brass and is ideal for smaller cabinet doors or panels. The strike slides between two stainless steel balls, which are under spring tension. As the strike engages, the door is held firmly shut. Strike can enter body from either side and front. Spring tension is easily adjusted to suit field conditions. Body can be surface applied or mortised into frame.



- Body: 2-3/16" tall x 1 1/2" wide x 1/2" deep
- Strike: 1-3/8" tall x 3/8" wide x 5/8" deep
- Finish: US3, US4, US10, US26 and US26D.
- Meets ANSI/BHMA 156.9, B13302

| Model |
|----------|
| 038-CL22 |

Ives Ball Catch

- Designed for door mounted strikes, square cornered.
- Faceplate: 2-1/8" x 1", Bore: 7/8" x 1-1/4"



| Model | Finish |
|-----------|--------|
| 038-346B3 | Brass |

Ives Roller Latches/Catches

Roller Latch RL30

Brass or bronze units feature silent rubber roller (nylon or nylon covered brass rollers optional) and are available with standard 2 1/4" x 1 11/16" strike or 4 7/8" ASA strike. Projection of roller is easily adjusted by way of adjusting screws on face of unit.



Roller Latch RL32

Available in brass, bronze, or stainless steel and is designed to fit a heavy-duty cylindrical lock mortise. Units feature silent rubber roller (nylon or nylon covered brass rollers optional) and are available with standard 2 3/4" x 1 1/8" strike or 4 7/8" ASA strike. Knurled nut on back of latch provides easy adjustment of roller projection.



Light Duty Roller Latch RL36

Ideal for lighter duty applications, this model is available in stainless steel material. Units feature silent action nylon roller and are furnished with standard 2 3/4" x 1 1/8" strike or optional ASA strike. Units fit standard cylindrical lock. Adjusting screw on back of unit allows for easy adjustment or roller projection.



| Models | Description |
|----------|--------------|
| 038-RL30 | Roller Latch |
| 038-RL32 | Roller Latch |
| 038-RL36 | Roller Latch |