

See price list for available finishes (finish chart is on the order form)

## DCI Self Latching Automatic Flush Bolts For Wood Doors

- Conforms to ANSI/BHMA 156.3, Type 27, ANSI Curved Lip Strike
- Operation: Top bolt No. 905 shall automatically engage curved lip frame strike every time the inactive door is closed. Bolt shall remain engaged until retracted by depressing plunger on the face of the bolt. The bottom bolt 940 will engage sill strike only when active door is closed. When active and inactive doors are closed top and bottom bolts are engaged.
- Low Closing Force: Patented free floating cams require a maximum of 5 lbs. closing force on active door to extend bottom bolt.
- Override Feature: Prevents damage to doors or bolts should bolt heads be prevented from entering top or bottom strike.
- Available in architectural finishes.



Models	Description
019-905	Non-Handed Top Bolt
019-940	Non-Handed Bottom Bolt
019-945	Set of 905 Top Bolt and 940 Bottom Bolt

## DCI Self Latching Automatic Flush Bolts For Metal Doors

- Conforms to ANSI/BHMA 156.3, Type 27, ANSI Curved Lip Strike
- Operation: Top bolt No. 805 shall automatically engage curved lip frame strike every time the inactive door is closed. Bolt shall remain engaged until retracted by depressing plunger on the face of the bolt. The bottom bolt 840 will engage sill strike only when active door is closed. When active and inactive doors are closed top and bottom bolts are engaged.
- Low Closing Force: Patented free floating cams require a maximum of 5 lbs. closing force on active door to extend bottom bolt.
- Override Feature: Prevents damage to doors or bolts should bolt heads be prevented from entering top or bottom strike.
- Available in architectural finishes.



Models	Description
019-805	Non-Handed Top Bolt
019-840	Non-Handed Bottom Bolt
019-845	Set of 805 Top Bolt and 840 Bottom Bolt

## DCI Manual Flush Bolts

- Conforms to the ANSI/BHMA 156.16, BHMA 24081.
- Manual Flush Bolts are installed in the inactive door. The lever mechanism extends the bolt head 3/4" into the frame and sill strike, locking the inactive door.
- All rods have 1/2" adjustment for door and strike clearance.
- Stock Finishes: US Standard: US3, US4, US10, US10B, US26, US26D.

Models	Description
019-780F	Metal Doors, Fire-Rated 3 Hours
019-790F	Wood Doors, Fire-Rated 1 Hour



## DCI Automatic Flush Bolts

- Conforms to ANSI/BHMA 156.3, Type 25.
- Fully Automatic: Opening active door automatically retracts top and bottom bolts. Closing active door automatically extends both top and bottom bolts 3/4" into frame and sill strikes, locking inactive door. (Dust proof strike optional.)
- Low Closing Force: Patented free floating cams require a maximum of 5 lbs. closing force on active door to extend both top and bottom bolts.
- Override Feature: Prevents damage to doors or bolts should bolt heads be prevented from entering top or bottom strike.
- Available in architectural finishes.



Models	Description
019-840	Non-Handed Single Bolt Metal Doors
019-842	Set of 840 Bolts
019-940	Non-Handed Single Bolt Wood Doors
019-942	Set of 940 Bolts

See price list for available finishes (finish chart is on the order form)

## DCI Bottom Fire Bolt

- UL Listed for pairs of fire doors when specified with the 840, 940, & 960 Automatic Flush Bolts.
- The BFB Bottom Fire Bolt eliminates the bottom automatic flush bolt and dust proof strike. The BFB is installed horizontally in the inactive door, with a mating hole in the edge of the active door. When subjected to 230 degrees F the BFB projects a bolt, locking the leaves together.



Models	Description
019-8BFB	Bottom Fire Bolt - Metal Doors
019-9BFB	Bottom Fire Bolt - Wood Doors

## Ives Flush Bolts

- Solid brass, high quality
- 1" throw
- 1/2" diameter brass bolt head
- 15/32" rod backset, 6" length

038-262



Models
038-262B 3
038-262B 26D

## Ives Extension Flush Bolt

- U.L. listed, solid brass.
- 3/4" rod backset, rod length - 12"
- 458 fits standard ANSI A 115.4
- Faceplate: 457: 1-1/4", 458: 1"

038-457



Models
038-457B 26D
038-458 26D

## Ives Manual Flush Bolts Metal Doors

- Body Size:  
**FB256N** 3/4" wide x 6-3/8" long x 1 1/8" deep  
**FB257N** 1 1/4" wide x 6 3/8" long x 1 1/8" deep  
**FB258N** 1" wide x 6 3/8" long x 1 1/8" deep
- Guide Size: 1" wide x 2" long x 1/8" deep
- Strike Size: 15/16 wide x 2-1/4 long x 5/64 thick
- Rod: 1/4-20 threaded rod



Models	Size
038-FB256N	3/4" wide x 6-3/8" long x 1 1/8" deep
038-FB257N	1 1/4" wide x 6 3/8" long x 1 1/8" deep
038-FB258N	1" wide x 6 3/8" long x 1 1/8" deep

## Ives Manual Flush Bolts Metal Doors

- Body Size: 1-1/4" wide x 6-3/4" long x 1-1/8" deep
- Guide Size: 1" wide x 2" long x 5/64" thick
- Strike Size: 15/16" wide x 2-1/4" long x 5/64" thick
- Rod: 1/4-20 threaded Rod

038-FB457 038-FB457N



Models	Description
038-FB457	UL Listed for Fire Doors
038-FB457N	Not UL Listed for Fire Doors

## Ives Manual Flush Bolts – Wood Doors

- Body Size: 1" wide x 6-3/4" long x 1-3/8" Deep
- Guide Size: 1" wide x 2-1/2" long x 5/64 thick
- Strike Size: 15/16 wide x 2-1/4" long x 5/64" thick



Model
038-FB358

See price list for available finishes (finish chart is on the order form)

## Ives Automatic Flush Bolt

- For metal doors.
- U.L. listed, fits ANSI Prep. Installed, top and bottom, on inactive leaf of a pair of doors.
- Actuates cam and gear train, which converts rotary to linear motion, positively bolting inactive door.
- When active leaf is opened, bolts automatically retract.



038-559

Model
038-PR559B 26D



038-FB41P

038-FB31P

## Ives FB31P/FB41P Series Automatic Flush Bolts

### Model 031-FB31P

- Automatic flush bolts fits standard ANSI preparation for metal doors, and U.L. listed for all (A,B,C,D,& E labled) Metal doors, up to 8 feet in height.
- Effective throw of 3/4" and a 2" vertical adjustment.
- Made of steel & stainless steel components.
- UL rated - 3 hour doors.

### Model: 031-FB41P

- FB41P is UL/cUL listed for pairs of wood doors .
- Rated up to 1-1/2 hours.
- Effective throw of 3/4" with a 3/4" vertical adjustment.
- Made of steel & stainless steel components.

Models	Description
038-FB31P	Metal Doors
038-FB41P	Wood Doors

## Rockwood Flush Bolts

- UL listed for use on A, B, C, D, and E labeled metal doors.
- Standard rod length is 12".
- Other lengths are available to order.




Models	Finish
057-555	MDUL3
057-555	26D

## Flush Bolts

- **Shelf Pack:** 10 Box Packaged
- **Finishes:**  
(1555) 605, 612, 613, 625, 626  
(1557) 605, 612, 613, 625, 626  
(1640, 1640R) 605, 609, 613, 619 620, 626  
(1555 Longer rods available)
- Packaged and sold individually
- 1555-UL rated- For Metal doors
- 1557-UL rated- For wood doors
- 1640 1640R - 1" bolt throw 1/2" bolt diameter- For wood doors

022-1555      022-1557      022-1640      022-1640R

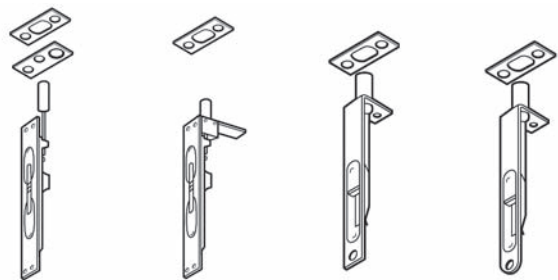

Models	Dimensions	ANSI
022-1555	6-3/4" x 1"	L14251, L14081
022-1557	6-3/4" x 1"	-
022-1640	6" x 3/4"	L04201
022-1640R	6" x 3/4"	L04201